


# 105 LT ALUMINUM CYLINDER

The Global Calibration Gases 105 liter aluminum cylinder has a low profile C10 valve and is used with non reactive gases. It equals the steel 103L for variety of mixes but is lighter and easier to handle.

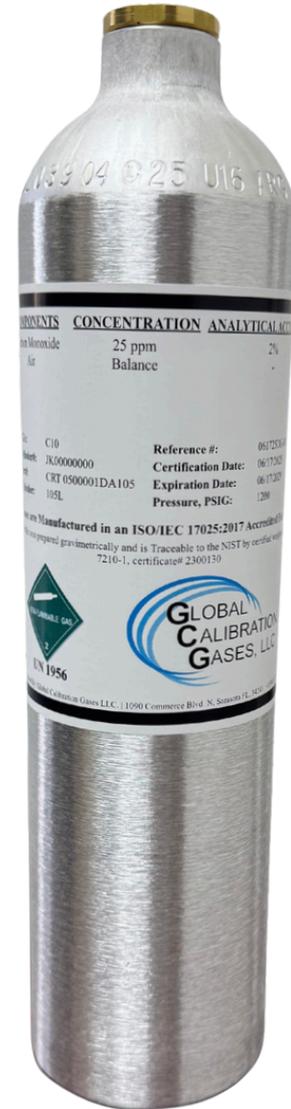

Characteristic	
<b>Gas Type</b>	Non-Reactive
<b>Contents</b>	105 liters
<b>Pressure</b>	82 Bar (1200 Psi)
<b>Dimensions</b>	330 mm x 82 mm (13" x 3 1/4")
<b>Weight</b>	0.73 kg (1.6 lb)
<b>Material</b>	Aluminum Alloy

Specifications			
Approvals	Fill Type	Valve Inlet	Recommended Equipment
Global	Non-Refillable & Refillable	5/8"-18 UNF (C10)	Most commonly used regulators include the brass fixed flow C10, Demand Flow & Dial A Flow