




# 116 LT ALUMINUM CYLINDER

Our 116 liter cylinders are available for Reactive / Non-Reactive gas mixtures, supplied with either a single gas or a complex blend. Most commonly supplied in 4 or 5 gas mixtures such as CH<sub>4</sub>, O<sub>2</sub>, CO, H<sub>2</sub>S and even adding SO<sub>2</sub> or CO<sub>2</sub>. All 116L cylinders have the universal C10 valve as standard.

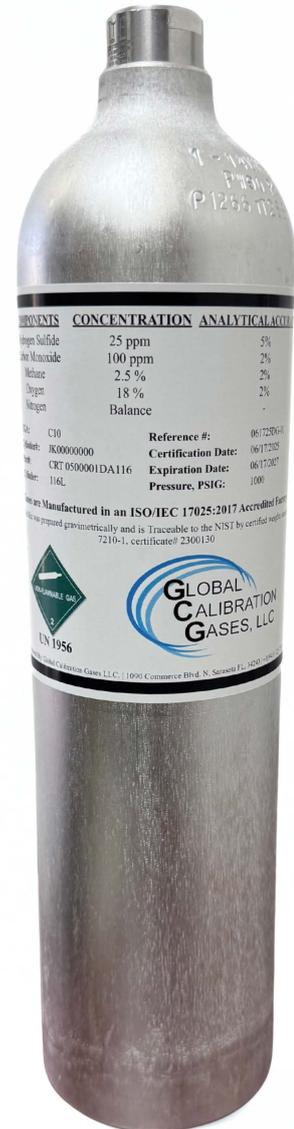

|                   | Characteristic                |
|-------------------|-------------------------------|
| <b>Gas Type</b>   | Reactive / Non-Reactive       |
| <b>Contents</b>   | 116 liters                    |
| <b>Pressure</b>   | 70 Bar (1000 Psi)             |
| <b>Dimensions</b> | 381 mm x 89 mm (15" x 3 1/2") |
| <b>Weight</b>     | 1.0 kg (2.25 lb)              |
| <b>Material</b>   | Aluminum Alloy                |

| Specifications |                             |                   |   |
|----------------|-----------------------------|-------------------|---|
| Approvals      | Fill Type                   | Valve Inlet       | Recommended Equipment   |
| Global         | Non-Refillable & Refillable | 5/8"-18 UNF (C10) | Most commonly used regulators include the fixed flow C10, DFR & DAF |